


TECHNICAL SPECIFICATIONS - SCREEN SUPPORTS

Essential Single Monitor Arm with Docking Station



Essential Double Monitor Arms with Docking Station

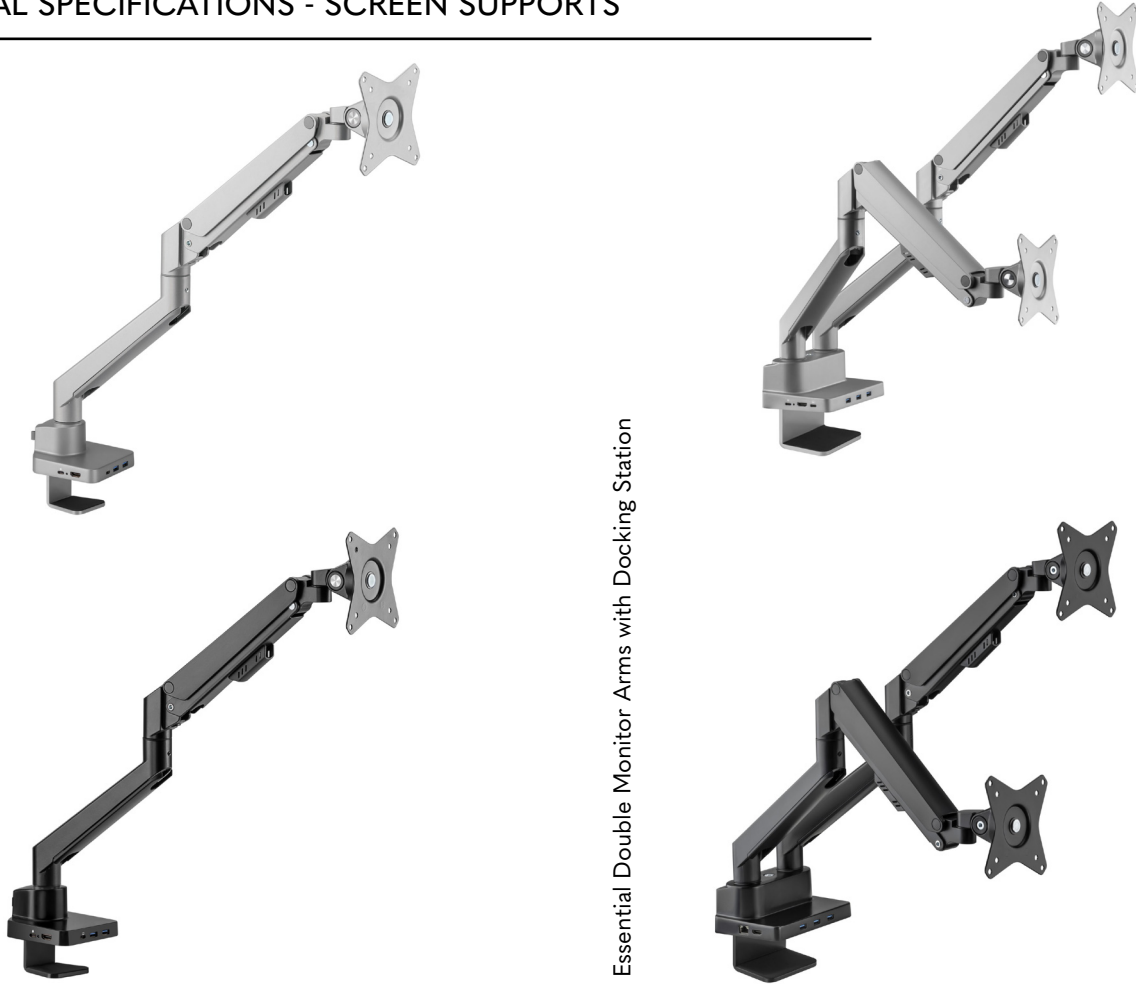

Select Single Monitor Arm



Select Double Monitor Arms



	Essential Single Monitor Arm with Docking Station	Essential Double Monitor Arms with Docking Station	Select Single Monitor Arm	Select Double Monitor Arms
Monitor Size	From 17" (432 mm) to 32" (813 mm)		Up to 27" (686mm)	
Cable Management	Yes		Yes	
Weight Capacity	Up to 17.6 lb (8 kg) per arm		Up to 15.4 lb (7kg) per arm	
Product Weight	6.7 lb (3 kg)	10.3 lb (4.7 kg)	5.2 lb (2.4 kg)	8.7 lb (4 kg)
Materials	Aluminum, steel and plastic		Aluminum, steel and plastic	
Monitor Position	Horizontal, Vertical		Horizontal, Vertical	
VESA	75/100		75/100	
Monitor Center Maximum Height	19 1/16" (485 mm)	19 5/16" (490 mm)	10 11/16" (335 mm)	12 3/16" (365 mm)
Range	20 11/16" (525 mm)	20 11/16" (525 mm)	11 1/18" (283mm)	13 1/8" (333 mm)
Lock at 180°	No		Yes	
Installation	Edge C clamp, drill screw or grommet		Edge C clamp, drill screw or grommet	
	Knife edge adaptor sold separately		Knife edge adaptor sold separately	
Finishes	Black, Silver		Black, Silver	
Docking Station	Yes		No	
Docking Station Specifications	USB-A port (5Gbps): 2	USB-A port (5Gbps): 3	N/A	
	Port Type-C: 1	Type-C port: 1		
	Port type PD (100W): 1	Port type PD (100W): 1		
	HDMI 2.0 (4K@60Hz): 1	HDMI 2.0 (4K@60Hz): 2		
	RJ45 Ethernet (1000Mbps): 1	RJ45 Ethernet (1000Mbps): 1		
Codes				
Silver	LGC-SUPE1A2SEDS	LGC-SUPE2A2SEDS	LGC-SUPE1A1SSNS	LGC-SUPE2A1SSNS
Black	LGC-SUPE1A2SEDK	LGC-SUPE2A2SEDK	LGC-SUPE1A1SSNK	LGC-SUPE2A1SSNK

GENERAL INFORMATION

- Monitor arms must be used in accordance with the technical specifications (screen dimensions and max. weight) and exclusively above the surface.
- The use of the monitor arm extending outside the surface is not recommended. This is valid for all monitor arms, with or without knife edge adaptor.
- For installation of monitor arms on a surface with knife edge, an adaptor is required and must be ordered separately (\$).
- Essential monitor arms include a built-in docking station and may require a computer restart after initial connection.
- It is recommended to only use the Select single monitor arm on QUORUM Multiconference training tables, placing it centered on the length.
- Only Select monitor arms are recommended for use on height adjustable tables.
- These monitor arms include a «worm screw» that must be tightened to lock the bracket 180 degrees (see product manual for details).
- Use on height adjustable tables:
 - Single monitor arm: no restriction on surface height.
 - Double monitor arms: recommended maximum surface height of 38" when the monitor arms are installed on freestanding height adjustable tables.